



## 480W, 24V DC Output DIN Rail Power Supply




Features	Benefits
• High Efficiency	• Saves Energy & Cost
• 84mm Width	• More Space in Control Equipment
• EMC: EN 55022 Curve B, Conducted & Radiated	• Easier System Integration
• 7 Year eCap-Life	• Prolonged Lifetime Expectation
• 3 Year Warranty	• TDK-Lambda Proven Reliability



Specification		DRB480-24-1
<b>Model</b>		<b>DRB480-24-1</b>
Input Voltage Range (1)	VAC	90 - 264
Input Frequency	Hz	47 - 63
Inrush Current (Cold Start)	A	<40A at 264
Power Factor (120/230VAC)	-	0.98 / 0.96 (Meets EN61000-3-2 Class A)
Input Current (120/230VAC)	A	5 / 2.5
Leakage Current	mA	<1.7mA at 264VAC 63Hz
Line Regulation	mV	<24
Load Regulation	mV	<240
Ripple & Noise	mV	<240
Temperature Coefficient	%/°C	<±0.02
Overcurrent Protection	-	105 - 145% (Hiccup style)
Overvoltage Protection	-	30V ±2%. Cycle input voltage to reset
Overtemperature Protection	-	Yes
Hold Up Time	ms	>16
Efficiency (120 / 230VAC)	%	>90 / 92%. Average efficiency >87%
LED Indicator	-	Green LED = DC is OK
DC OK Relay	-	Relay contacts rated at 0.02A
Operating Temperature	°C	-20°C to +70°C. Start up at -40°C. (Derate linearly to 62.5% load from 50°C to 70°C)
Storage Temperature	°C	-40°C to +85°C
Humidity (non condensing)	%RH	5 - 95%RH (Operating and storage)
Parallel Operation	-	No
Series Operation (2)	-	Yes
Cooling	-	Convection
Withstand Voltage (For 1 minute)	VAC	Input to Output 3kVAC, Input to GND 1.5kVAC, Output to GND 500VAC
Isolation Resistance	MΩ	>100MΩ at 25°C, 70%RH & 500VDC
Vibration (Non operating)	-	2G, IEC 60068-2-6, 10 to 500Hz
Shock	-	5G, IEC 60068-2-27, half-sine, 22ms, 3 x each axis on DIN rail
Safety Agency Certifications	-	UL508 (UL840), CSA22.2 No. 107.1-01, IEC/EN/UL60950-1, CE Mark
Conducted & Radiated EMI	-	EN55011-B, EN55022-B, CISPR11-B, CISPR22-B, EN61204-3 Class A
Immunity	-	EN61000-4-2 (lvl 3), -3 (lvl 3), -4 (lvl 3), -5 (lvl 3), -6 (lvl 3), -8 (lvl 4), -11
Weight (Typ)	g	1000
Size (WxHxD)	mm	84 x 125 x 124
Case Material	-	Metal
Warranty	yrs	3

**Notes:** (1) Derate linearly to 92.5% load from 100 to 90VAC (2) See installation manual

## Outline Drawing DRB480 Series

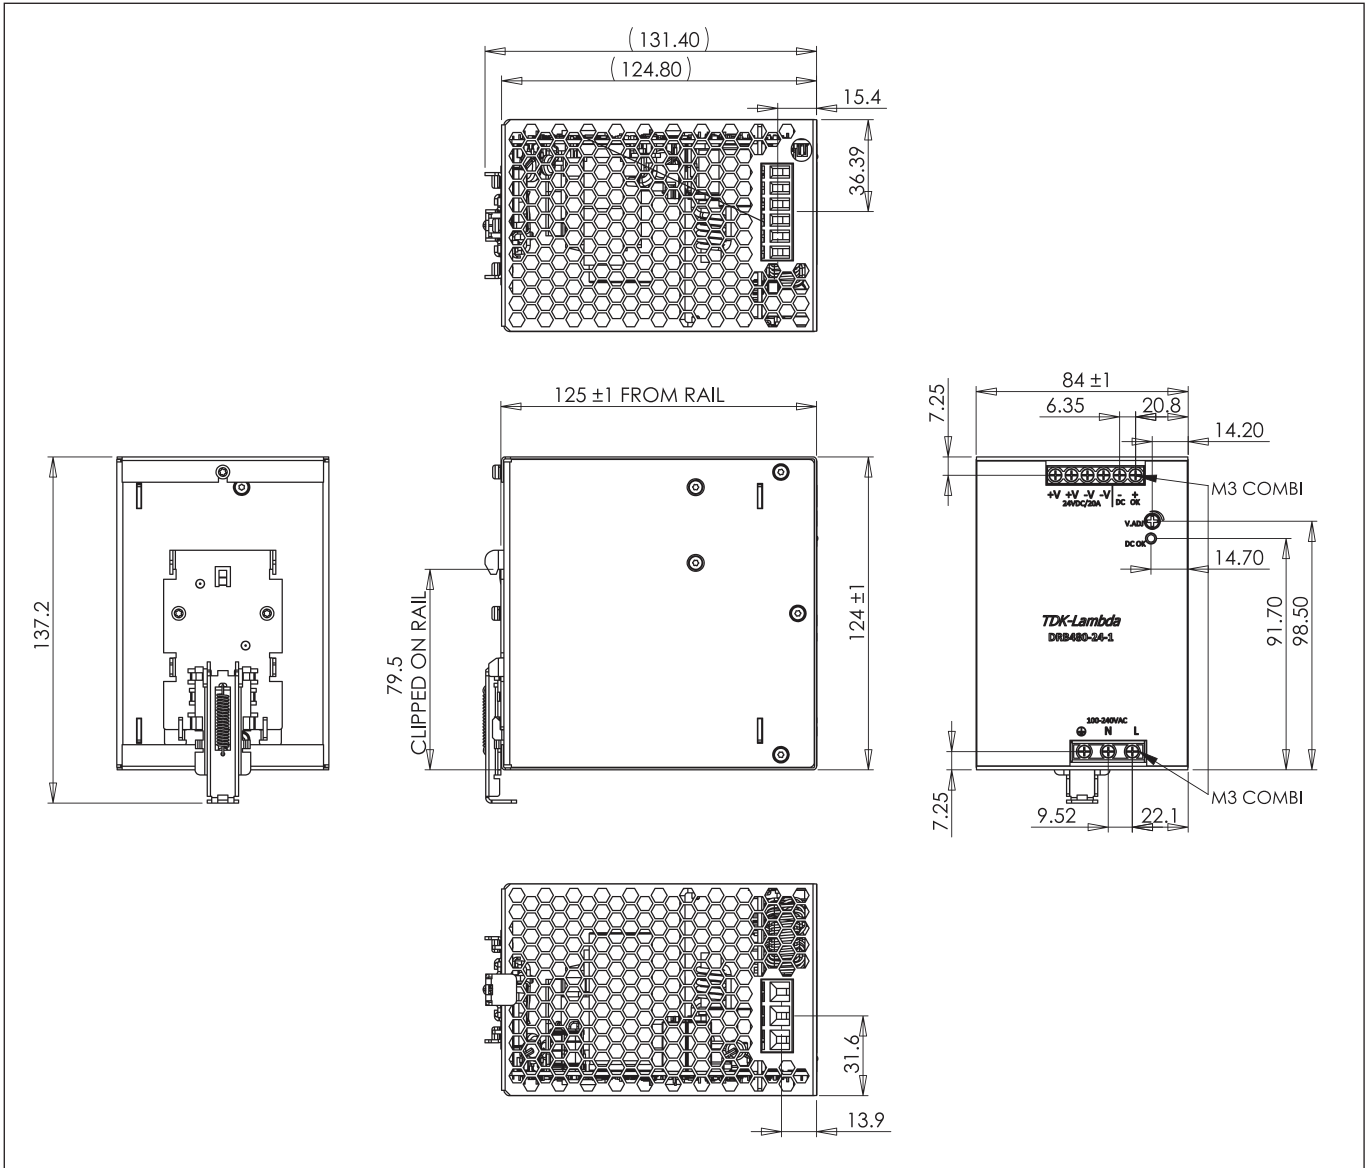

### Model Selector

Model	Output Voltage	Adjust Range	Max Current	Max Power
DRB480-24-1	24V	24 - 26.4V	20A	480W



## TDK-Lambda France SAS

3 Avenue du Canada  
 Parc Technopolis  
 Bâtiment Sigma  
 91940 les Ulis  
 France  
 Tel: +33 1 60 12 71 65  
 Fax: +33 1 60 12 71 66  
[france@tdk-lambda.com](mailto:france@tdk-lambda.com)  
[www.fr.tdk-lambda.com](http://www.fr.tdk-lambda.com)



## Italy Sales Office

Via dei Lavoratori 128/130  
 20092 Cinisello Balsamo (MI)  
 Italy  
 Tel: +39 02 61 29 38 63  
 Fax: +39 02 61 29 09 00  
[info.italia@it.tdk-lambda.com](mailto:info.italia@it.tdk-lambda.com)  
[www.it.tdk-lambda.com](http://www.it.tdk-lambda.com)



## Netherlands

[info@nl.tdk-lambda.com](mailto:info@nl.tdk-lambda.com)  
[www.nl.tdk-lambda.com](http://www.nl.tdk-lambda.com)



## TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40  
 77855 Achern  
 Germany  
 Tel: +49 7841 666 0  
 Fax: +49 7841 5000  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



## Austria Sales Office

Aredstrasse 22  
 2544 Leobersdorf  
 Austria  
 Tel: +43 2256 655 84  
 Fax: +43 2256 645 12  
[info@at.tdk-lambda.com](mailto:info@at.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



## Switzerland Sales Office

Bahnhofstrasse 50  
 8305 Dietlikon  
 Switzerland  
 Tel: +41 44 850 53 53  
 Fax: +41 44 850 53 50  
[info@ch.tdk-lambda.com](mailto:info@ch.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



## Nordic Sales Office

Haderslevvej 36B  
 DK-6000 Kolding  
 Denmark  
 Tel: +45 2911 9556  
[info@dk.tdk-lambda.com](mailto:info@dk.tdk-lambda.com)



## TDK-Lambda UK Ltd.

Kingsley Avenue  
 Ilfracombe  
 Devon EX34 8ES  
 United Kingdom  
 Tel: +44 (0) 12 71 85 66 66  
 Fax: +44 (0) 12 71 86 48 94  
[powersolutions@uk.tdk-lambda.com](mailto:powersolutions@uk.tdk-lambda.com)  
[www.uk.tdk-lambda.com](http://www.uk.tdk-lambda.com)



## TDK-Lambda Ltd.

Kibbutz  
 Givat Hashlosha 48800  
 Israel  
 Tel: +9 723 902 4333  
 Fax: +9 723 902 4777  
[info@tdk-lambda.co.il](mailto:info@tdk-lambda.co.il)  
[www.tdk-lambda.co.il](http://www.tdk-lambda.co.il)



## C.I.S.

**Commercial Support:**  
 Tel: +7 (495) 665 2627  
**Technical Support:**  
 Tel: +7 (812) 658 0463  
[info@tdk-lambda.ru](mailto:info@tdk-lambda.ru)  
[www.tdk-lambda.ru](http://www.tdk-lambda.ru)

## Local Distribution

